


Yamada Air Operated Double

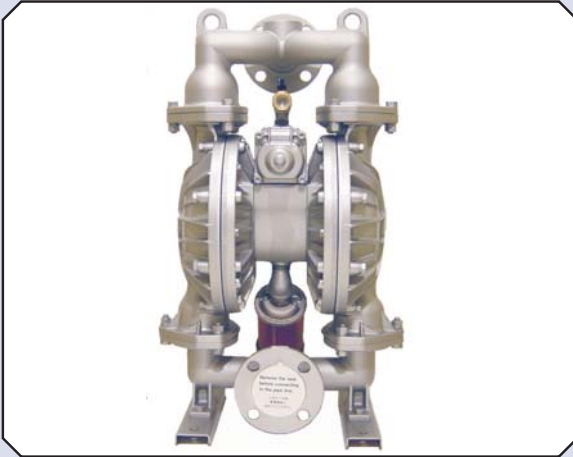

DIAPHRAGM PUMPS

These pumps are lightweight, compact and easy to use for pumping a wide range of liquids. As they are air operated they are ideal for pumping volatile or inflammable liquids in hazardous areas.

Self-priming from a dry start these pumps are ideal in situations where liquid has to be pulled from a container. The pumps can also run dry.

The robust construction reduces maintenance to a minimum.

Model NDP-5 - 1/4" Maximum Capacity 10 L/min

SPECIFICATION

Pump Model		NDP-5-FPT	NDP-5-FVT	NDP-5-FAT	NDP-5-FST
Port Dimensions	Liquid Inlet	1/4" BSP	1/4" BSP	1/4" BSPT	1/4" BSPT
	Liquid Outlet	1/4" BSP	1/4" BSP	1/4" BSPT	1/4" BSPT
	Air Inlet	1/4" BSPT (with ball valve)			
	Air Exhaust	Rc 3/8"			
Discharge Volume per Cycle		20 cc			
Air Pressure Range		0.2-0.5 MPa		0.2-0.7 MPa	
Maximum Discharge Pressure		0.5 MPa		0.7 MPa	
Maximum Solid Size		Less than 0.2 mm			
Weight		1.4 Kgs	1.45 Kgs	1.5 Kgs	3.0 Kgs
Wetted Materials		Polypropylene (PPG)	Kynar® (PVDF)	Aluminium (AC4C-T6)	Stainless Steel (SCS-14)
Diaphragm Materials		PTFE	PTFE	PTFE	PTFE

DIMENSIONS

Performance Curves

- Performance curves and test data are based on fresh water at ambient temperature. Discharge volume and head vary according to viscosity, specific gravity and other physical properties of the fluid/paste being pumped.
- To achieve the best diaphragm life and the most efficient air consumption, select a pump 1.5 times the required capacity.

Model NDP-10 / DP-10 - 3/8" Maximum Capacity 20 L/min

SPECIFICATION

		Plastic Pumps		Metal Pumps	
Port Dimensions	Liquid Inlet	3/8" BSP		3/8" BSPT	
	Liquid Outlet	3/8" BSP		3/8" BSPT	
	Air Inlet	1/4" BSPT (with ball valve)			
	Air Exhaust	Rc 3/8"			
Discharge Volume per Cycle		52 cc			
Air Pressure Range		0.2-0.5 MPa		0.2-0.7 MPa	
Maximum Discharge Pressure		0.5 MPa		0.7 MPa	
Maximum Solid Size		Less than 1.0 mm			
Weight		NDP-10-BP	3.6 Kgs	DP-10-BA	4.0 Kgs
		DP-10-BP	3.6 Kgs	DP-10-BS	6.4 Kgs
		DP-10-BTT	5.5 Kgs		

MATERIALS OF CONSTRUCTION

Wetted Materials	Polypropylene (PPG)	Polypropylene (PPG)	Teflon (PTFE)	Aluminium (AC4C-T6)	Stainless Steel (SCS-14)
Diaphragm Materials					
Neoprene Rubber (CR)	DP-10-BPC	NDP-10-BPC	N/A	DP-10-BAC	DP-10-BSC
Nitrile Rubber (NBR)	DP-10-BPN	NDP-10-BPN	N/A	DP-10-BAN	DP-10-BSN
Nordel® (EPDM)	DP-10-BPE	NDP-10-BPE	N/A	DP-10-BAE	DP-10-BSE
Santoprene® (TPO)	DP-10-BPS	NDP-10-BPS	N/A	DP-10-BAS	DP-10-BSS
Hytrel® (TPEE)	DP-10-BPH	NDP-10-BPH	N/A	DP-10-BAH	DP-10-BSH
PTFE	DP-10-BPT	NDP-10-BPT	DP-10-BTT	DP-10-BAT	DP-10-BST

Model NDP-15 - 1/2" Maximum Capacity 45 L/min

SPECIFICATION

		Plastic Pumps		Metal Pumps	
Port Dimensions	Liquid Inlet	1/2" BSP		1/2" BSPT	
	Liquid Outlet	1/2" BSP		1/2" BSPT	
	Air Inlet	1/4" BSPT (with ball valve)			
	Air Exhaust	Rc 3/8"			
Discharge Volume per Cycle		70 cc			
Air Pressure Range		0.2-0.5 MPa		0.2-0.7 MPa	
Maximum Discharge Pressure		0.5 MPa		0.7 MPa	
Maximum Solid Size		Less than 1.0 mm			
Weight		NDP-15-FP	3.6 Kgs	NDP-15-BA	4.0 Kgs
		NDP-15-FV	3.8 Kgs	NDP-15-BS	6.5 Kgs

MATERIALS OF CONSTRUCTION

Wetted Materials	Polypropylene (PPG)	Kynar® (PVDF)	Aluminium (AC4C-T6)	Stainless Steel (SCS-14)
Diaphragm Materials				
Neoprene Rubber (CR)	NDP-15-FPC	N/A	NDP-15-BAC	NDP-15-BSC
Nitrile Rubber (NBR)	NDP-15-FPN	N/A	NDP-15-BAN	NDP-15-BSN
Nordel® (EPDM)	NDP-15-FPE	N/A	N/A	N/A
Santoprene® (TPO)	NDP-15-FPS	N/A	NDP-15-BAS	NDP-15-BSS
Hytrel® (TPEE)	NDP-15-FPH	N/A	NDP-15-BAH	NDP-15-BSH
PTFE	NDP-15-FPT	NDP-15-FVT	NDP-15-BAT	NDP-15-BST

Notes:

Material of ball for Hytrel diaphragm pumps are Nitrile® rubber (NBR)

Material of ball for Santoprene Diaphragm pumps is Nordel® rubber (EPDM)

Every effort has been made during the preparation of this document to ensure the accuracy of statements and specifications. However, we do not accept liability for damage, injury, loss or expense caused by errors or omissions made. We reserve the right to withdraw or amend products or documentation without notice.

Head Office: 2 Downgate Drive, Sheffield, S4 8BT, England
Tel: +44(0)114 244 2521 Fax: +44(0)114 243 4838



2 Downgate Drive, Sheffield, S4 8BT, England
Tel: +44(0)114 244 2521 Fax: +44(0)114 243 4838
email: sales@roxspur.com www.roxspur.com



CERTIFICATE No: FM22358

05HWR0111