

## P6420-26 Field Re-Rangeable Transmitter

The P6420-26 is a high performance, temperature compensated pressure transmitter having a two wire, 4 - 20mA output, with a facility for re-ranging by the user. It is available in standard ranges from 0 - 10 to 0 - 100 metres water gauge, or may be scaled to customer requirements. All ranges are available in gauge or absolute format.

### DESCRIPTION

The P6420-26 pressure transmitter is based on a four active arm strain gauge bridge fused to a high purity ceramic diaphragm, offering high natural output coupled with superb chemical and corrosion resistance. It offers a two wire, 4-20mA output proportional to liquid level. The sensing element and its associated electronics are housed in a rugged two part stainless steel case, which provides access to the 5:1 turndown facility DIL switches and zero & span potentiometers. The two halves are secured by means of cap headed screws and an O-ring seal, which when coupled with the IP68 sealed cable gland, provides a high integrity waterproof assembly.

Both sensor and electronics are protected from the effects of lightning strikes by the inclusion of a lightning protection circuit.



### FEATURES

- 5:1 turndown facility
- 4-20mA, two wire output
- Excellent linearity
- Wide temperature range
- Lightning protection
- Rugged construction
- Excellent long term stability
- Temperature compensated

### OPTIONS

- Low power version 9-30V
- Alternative body materials for chemical and seawater applications
- Extended temperature range capability
- Higher accuracy versions

### APPLICATIONS


- Water level/pressure
- Soil mechanics
- Tank contents

### SPECIFICATION

<b>Pressure Range</b>	0-10, 20, 50 and 100 metres water gauge or absolute. Other ranges available
<b>Excitation</b>	9-30V or 20-50Vdc unregulated (factory set)
<b>Output</b>	Span 16mA $\pm$ 1% Zero 4mA $\pm$ 1% of span at zero pressure
<b>Non Linearity, Hysteresis &amp; Repeatability (NLH)</b>	< $\pm$ 0.25% of span (best fit straight line)
<b>Compensated Temp Range</b>	-10°C to 80°C
<b>Operating Temp Range</b>	-25°C to 100°C
<b>Thermal Zero Shift</b>	< $\pm$ 0.015% span/°C
<b>Thermal Span Shift</b>	< $\pm$ 0.008% reading/°C
<b>Safe Over-Range</b>	1.5 x rated range minimum
<b>Burst Pressure</b>	3 x rated range minimum
<b>Pressure Connection</b>	G1/4 female (1/4" BSP) - for calibration purposes
<b>Loading Driving</b>	1.5k $\Omega$ @ 50Vdc supply maximum
<b>Environmental Protection</b>	Sealed to IP68 up to 100mWG
<b>Electrical Connection</b>	Fully screened polyurethane sheathed cable with vent tube & strain wire. Red; +ve Blue; -ve White; earth
<b>Insulation Resistance</b>	>500M $\Omega$ at 500Vdc
<b>Long Term Stability</b>	0.1% span/12 months
<b>Wetted Parts</b>	303 stainless steel, alumina ceramic and nitrile rubber seals (other seal materials available)

## SWITCH POSITION DETAILS

Turndown Ratio	Switch 1	Switch 2	Switch 3	Switch 4
1:1	on	off	off	off
2:1	off	on	off	off
3:1	off	off	on	off
4:1	off	off	off	on
5:1	off	off	off	off

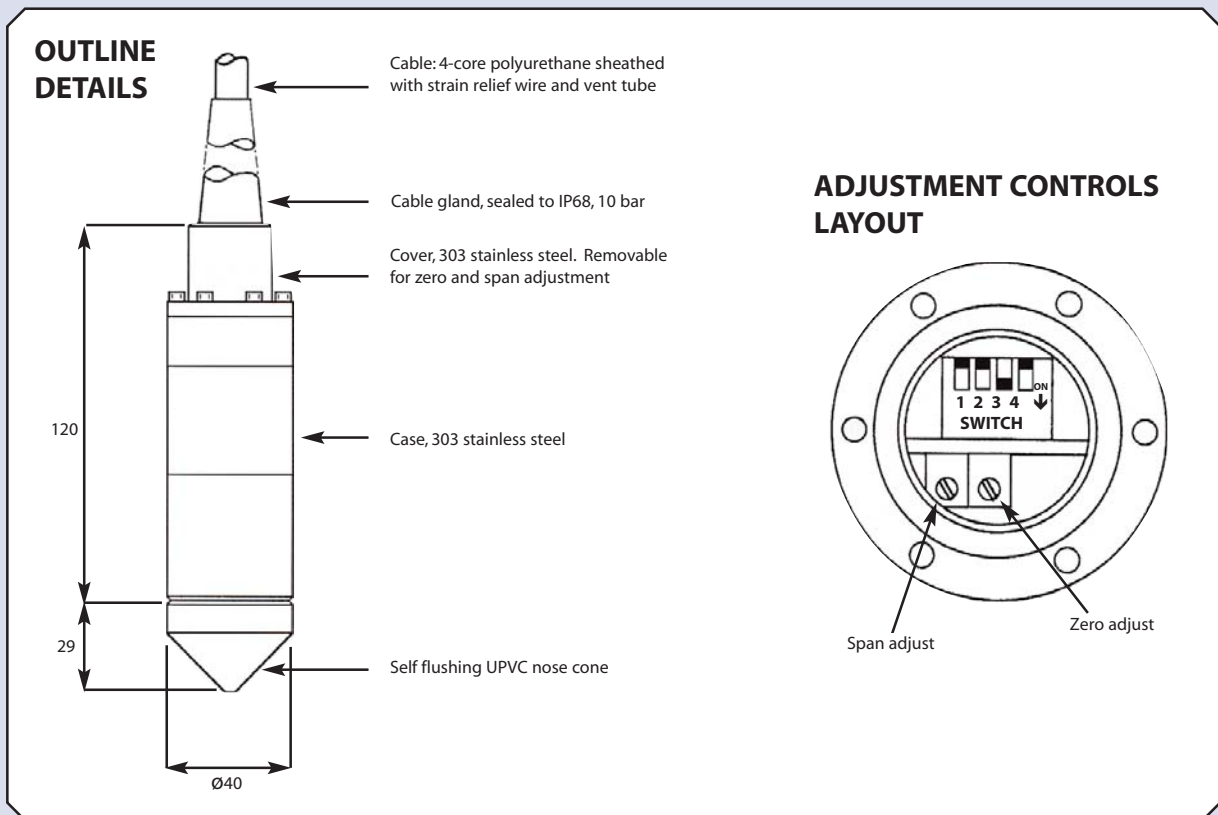

Every effort has been made during the preparation of this document to ensure the accuracy of statements and specifications. However, we do not accept liability for damage, injury, loss or expense caused by errors or omissions made. We reserve the right to withdraw or amend products or documentation without notice.

Head Office: 2 Downgate Drive, Sheffield, S4 8BT, England  
Tel: +44(0)114 244 2521 Fax: +44(0)114 243 4838



**RM&C** Roxspur  
Measurement  
& Control Ltd

1-4 Campbell Court, Bramley, Tadley, Hampshire, RG26 5EG, England  
Tel: +44(0)1256 884901 Fax: +44(0)1256 882986  
email: [sales@roxspur.com](mailto:sales@roxspur.com) [www.roxspur.com](http://www.roxspur.com)



CERTIFICATE No. FM22358