

## HPS-A Series 4-20mA Output Pressure Transmitter

Two wire, 4-20mA output transmitters offering superb chemical and corrosion resistance. Gauge or Absolute pressure is detected using a four active arm strain gauge bridge sensor, fused to a high-purity ceramic diaphragm. Available in three classes of accuracy and compensation specified below, with ranges from 100mbar to 600 bar or scaled to customer requirements.

- Stainless Steel housing
- Rugged construction
- Excellent linearity
- Excellent long term stability
- Wide temperature range
- Intrinsically safe versions available

### CLASS A HIGH SPECIFICATION TRANSMITTER

|  |   |
|--|---|
| <b>Output Span</b>   | 16mA ±0.5%  |
| <b>Output Zero</b>   | 4mA ±0.5% of span   |
| <b>Non Linearity, Hysteresis &amp; Repeatability (NLH)</b> | ±0.1% of span (best fit straight line)                              |
| <b>Compensated Temp Range</b>                              | -20°C to 125°C  |
| <b>Operating Temp Range</b>                                | -20°C to 125°C  |
| <b>Thermal Zero Shift</b>                                  | 0 to 100°C, ±0.01% of span / °C<br><0°C & >100°C, ±0.015% span / °C |
| <b>Thermal Span Shift</b>                                  | ±0.015% reading / °C typical  |
| <b>Long Term Stability</b>                                 | 0.1% / 12 months typical  |
| <b>Power Supply</b>  | 10 to 32Vdc   |
| <b>Loop Resistance</b>                                     | 1.1k Ω max @32Vdc supply  |

### CLASS B INDUSTRIAL TRANSMITTER

|  |   |
|--|---|
| <b>Output Span</b>   | 16mA ±1%                                |
| <b>Output Zero</b>   | 4mA ±1% of span                         |
| <b>Non Linearity, Hysteresis &amp; Repeatability (NLH)</b> | ±0.15% of span (best fit straight line) |
| <b>Compensated Temp Range</b>                              | -0°C to 100°C                           |
| <b>Operating Temp Range</b>                                | -20°C to 125°C                          |
| <b>Thermal Zero Shift</b>                                  | ±0.015% span / °C                       |
| <b>Thermal Span Shift</b>                                  | ±0.015% reading / °C typical            |
| <b>Long Term Stability</b>                                 | 0.1% / 12 months typical                |
| <b>Power Supply</b>  | 10 to 32Vdc                             |
| <b>Loop Resistance</b>                                     | 1.1k Ω max @32Vdc supply                |

### CLASS C GENERAL PURPOSE/OEM TRANSMITTER

|  |   |
|--|---|
| <b>Output Span</b>   | 16mA ±1%                                |
| <b>Output Zero</b>   | 4mA ±1% of span                         |
| <b>Non Linearity, Hysteresis &amp; Repeatability (NLH)</b> | ±0.25% of span (best fit straight line) |
| <b>Compensated Temp Range</b>                              | -0°C to 80°C                            |
| <b>Operating Temp Range</b>                                | -20°C to 125°C                          |
| <b>Thermal Zero Shift</b>                                  | ±0.04% span / °C                        |
| <b>Thermal Span Shift</b>                                  | ±0.015% reading / °C typical            |
| <b>Long Term Stability</b>                                 | 0.1% / 12 months typical                |
| <b>Power Supply</b>  | 10 to 32Vdc                             |
| <b>Loop Resistance</b>                                     | 1.1k Ω max @32Vdc supply                |

### OPTIONS

**Pressure Connection**  
 1/4" BSP male or female  
 1/2" BSP male  
 1/4" NPT male or female  
 1/2" NPT male  
 Others available on request





**Electrical Connection**  
 IP65 mini plug & socket  
 IP65 large plug & socket  
 IP65 cable & ferrule  
 IP68 glanded cable  
 Others available on request

**Housing Material**  
 316L Stainless Steel  
 Others available on request

**Intrinsically Safe**  
 EEx ia IIC T4



## DIMENSIONS

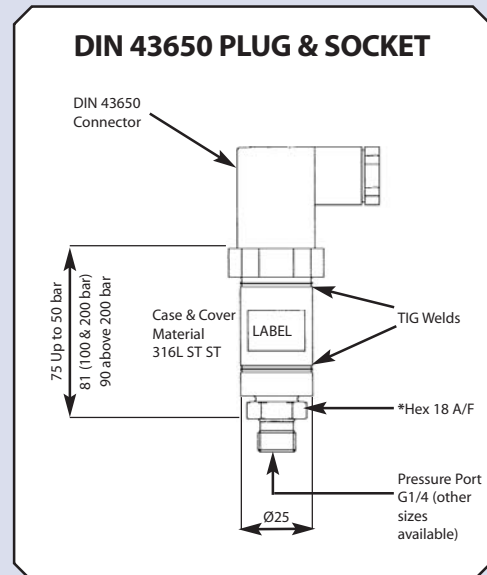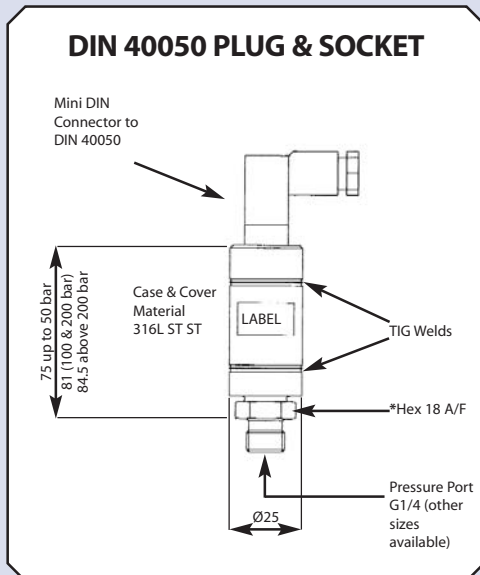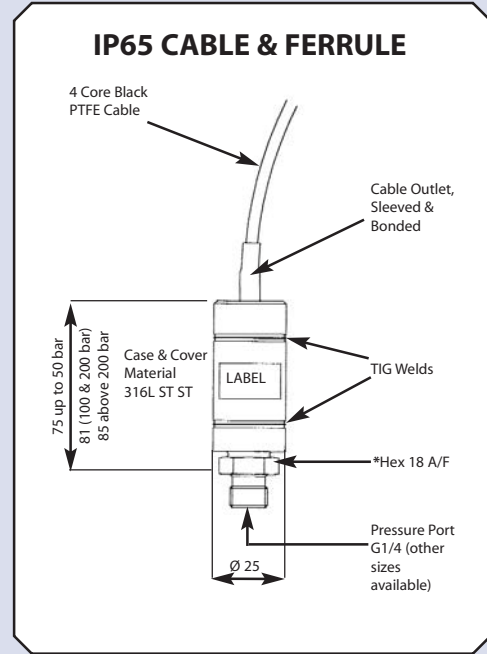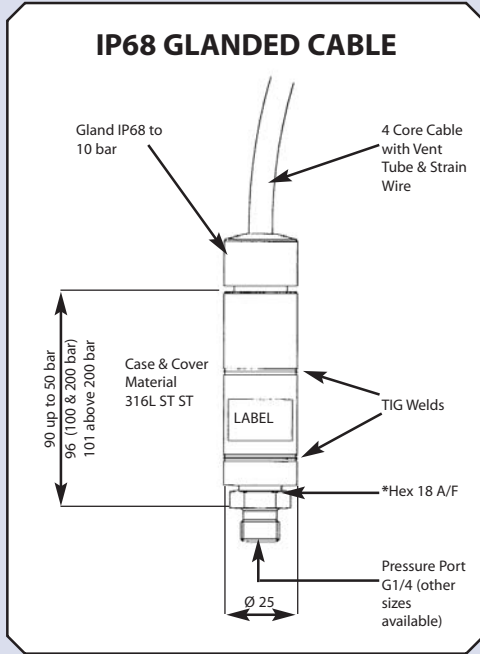

\* Note: >200 bar, Hexagon 27 A/F and diameter 27

**SENSIT pressure transducers are also available with the following outputs:**

- Voltage : 0-5V, 0-10V or 1-5V
- Active mV : 0-100mV or 0-200mV
- mA : 4-20mA

For level or depth measurement, use the **NEW TRIDENT Series of submersible pressure transducers**, or if your application requires something special, contact sales. If we do not already have the solution our OEM design team are ready to help.

*Every effort has been made during the preparation of this document to ensure the accuracy of statements and specifications. However, we do not accept liability for damage, injury, loss or expense caused by errors or omissions made. We reserve the right to withdraw or amend products or documentation without notice.*

Head Office: 2 Downgate Drive, Sheffield, S4 8BT, England  
Tel: +44(0)114 244 2521 Fax: +44(0)114 243 4838

## MECHANICAL SPECIFICATION

|                          |  |
|--------------------------|--|
| Safe Over-range Pressure | 1.5 x rated range  |
| Burst Pressure           | 3 x rated range minimum  |
| Wetted Materials         | Stainless steel, alumina ceramic, Viton (other O-ring materials available) |



**RM&C** Roxspur  
Measurement  
& Control Ltd

1-4 Campbell Court, Bramley, Tadley, Hampshire, RG26 5EG, England  
Tel: +44(0)1256 884901 Fax: +44(0)1256 882986  
email: [sales@roxspur.com](mailto:sales@roxspur.com) [www.roxspur.com](http://www.roxspur.com)

